

# Environmental Product Declaration



THE INTERNATIONAL EPD® SYSTEM



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

## Open Panel

from

**WB Timber Innovations Limited**



**Programme**

The International EPD System, [www.environdec.com](http://www.environdec.com)

**Programme**

EPD International AB

**Operator**

**EPD Registration**

EIS-EPD-0016039

**Publication Date**

2024-08-12

**Valid Until**


2029-08-11

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)



## General Information

<b>Programme</b>	The International EPD System
<b>Address</b>	EPD International AB
	Box 210 60
	SE-100 31 Stockholm
	Sweden
<b>Website</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>Email</b>	info@environdec.com

<b>Accountabilities for PCR LCA, and independent, third party verification</b>
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): EN 15804+A2, PCR 2019: 14 Construction Products and Services. Version 1.3.3, 2024-03-01, c-PCR-006 Wood and wood-based products for use in construction (EN 16485)
PCR review was conducted by Claudia A. Peña
Life Cycle Assessment (LCA)
Produced by: Enistic Limited, Oxford U.K. using One Click LCA EPD Generator for construction products, Ver. 1.13.0.
Lifecycle Accountability: Rebecca Eccles, Enistic Limited
Third Party Verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: EPD verification by individual verifier Third Party Verifier:  Hudai Kara, PhD, Metsims Sustainability Consulting, Oxford, U.K. Approved by: The International EPD System
Procedure for follow-up of data during EPD validity involves third party verifier: No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Company Information

<b>Owner of the EPD</b>	WB Timber Innovations Limited
<b>Contact</b>	Ed Kirk
<b>Description of Organisation</b>	Manufacturer of timber construction products.
<b>Product/Management System-Related Certifications</b>	EN 15804+A2, ISO 14025
<b>Name and location of production site(s):</b>	Timber Innovations (B90 4NZ)

## Product Information


<b>Product Name</b>	Open Panel
<b>Production Identification</b>	Open Panel
<b>Product Description</b>	An open timber wall panel features a framework of exposed wood, typically characterised by the use of timber beams and posts, OSB, and breather membrane to the external face.
<b>UN CPC Code</b>	311 - Wood, sawn or chipped lengthwise, sliced or peeled, of a thickness exceeding 6 mm
<b>Geographical Scope</b>	The timber supplier is located in Finland, meanwhile the manufacturing site and customers are located in the UK. The products use phase consists of the product being still and attached to a frame and so there is no energy used during this phase. It is assumed the panel will be disposed of in the UK.

## LCA Information

<b>Functional/Declared Unit</b>	1m <sup>3</sup> Open Panel
<b>Reference Service Life</b>	N/A
<b>Time Representativeness</b>	January 2022 - December 2022
<b>Databases and Software Used</b>	Ecoinvent Version 3.10, OneClick LCA Version 1.13.0
<b>Description of System Boundaries</b>	Cradle to gate with options, modules C1–C4, module D with optional modules (A1–A5 + C1-C4, and D.
<b>Averaging in EPD</b>	N/A
<b>Averages and Variability</b>	N/A
<b>Type of EPD</b>	This is a cradle to grave EPD covering A1-A3, A4-A5, C and D modules

# Manufacturer Information

## System Diagram:

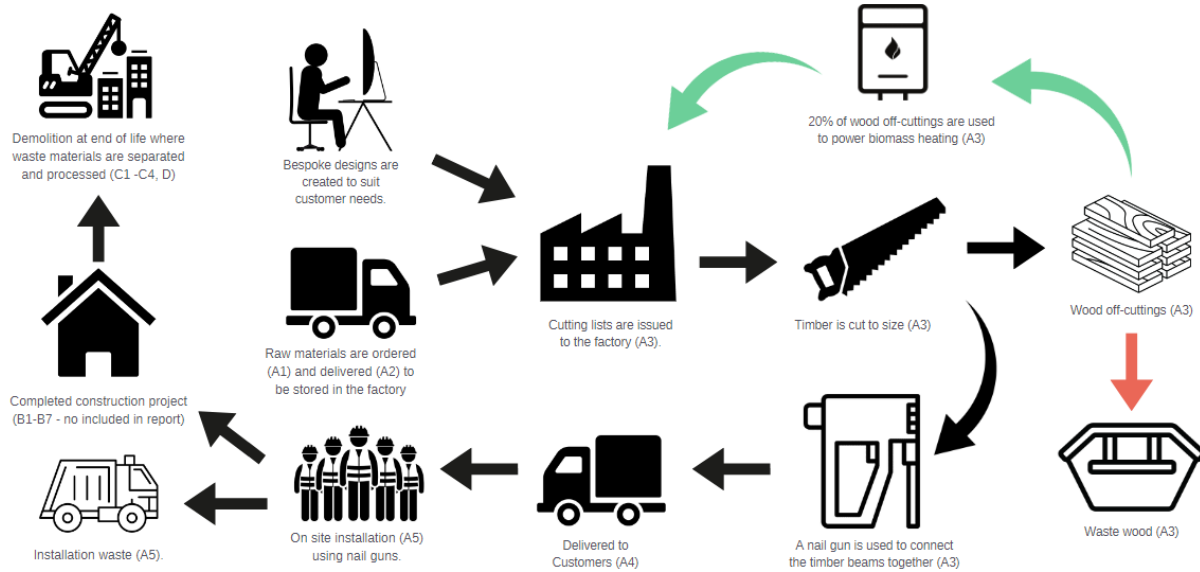

### About the Manufacturer:

WB Timber Innovations Limited is part of a wider group called Wyckham Blackwell Group (WBG). WBG is a high quality, innovative and customer-focused group that is committed to sustainability. All companies within WBG specialise in manufacturing a variety of timber products for the construction industry. WB Timber Innovations Limited most commonly manufactures timber panels for the construction of homes.

Further information can be found at <https://timberinnovations.co.uk/>

### Manufacturing and Packaging (A1-A3):

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Once the wood (A1) is delivered to the manufacturing site (A2), it is cut to size and the pieces are attached together with nails (A1) by using a nail gun which is powered by gas (A3). Any manufacturing waste is either disposed of or used to fuel the biomass boiler (A3). The final product is packaged using shrink wrap and metal banding clips.

### Transport and Installation (A4-A5):

Transportation impacts occurred from final products delivery to construction sites (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions. The final product is delivered by HGV to customers across the UK.

**Product Use and Maintenance (B1-B7):**

This EPD does not cover the use phase. Air, soil, and water impacts during the use phase have not been studied.

**Product End of Life (C1-C4):**

At the end-of-life, in the demolition phase 100% of the waste is assumed to be collected as separate construction waste. The demolition process consumes energy in the form of diesel fuel used by building machines (C1). The dismantled wooden element is delivered to the nearest construction waste treatment plant (C2). At the waste treatment plant, waste that can be reused, recycled, or recovered for energy is separated and diverted for further use. (C3). Unusable materials are disposed of in a landfill (C4). Due to the recycling potential of the steel and wood, they can be used as secondary raw material and as energy, respectively. This study assumes that 85% of steel is recycled and 15% goes directly to landfill. Meanwhile, it is assumed that 80% of waste wood is incinerated and 20% goes directly to landfill.

**Beyond System Boundary (D):**

Recycling of steel avoids the use of virgin raw material, and the heat recovered from the combustion of wood replaces the use of fossil fuels in energy production (D).

**Cut Off Criteria:**

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

**Allocation, Estimates, and Assumptions:**

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, any assumptions have been done in the following ways:

Module	Assumptions
<b>A2 Transport</b>	A “default route” from each supplier to WB Timber Innovations Limited’s site was assumed to be used for every delivery throughout the study period (January 2022 – December 2022).
<b>A3 Manufacturing Energy</b>	It was assumed that 50% of all panels manufactured were open panels and therefore it was assumed that 50% of energy used was for open panels.
<b>A4 Transport</b>	It was assumed that 50% of all panels manufactured were open panels and therefore it was assumed that 50% of Timber Innovation’s own haulage vehicles, and third party haulage vehicles, were used for delivery.

# Scope

	Product stage			Assembly Stage		Use stage							End of life stage				Beyond the System Boundaries		
	Raw Materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstr./demol.	Transport	Waste Processing	Disposal	Reuse	Recovery	Recycling
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
Modules Declared	x	x	x	x	x	ND	ND	ND	ND	ND	ND	ND	x	x	x	x	x		
Geography	FI, UK	FI, UK	UK	UK	UK								UK	UK	UK	UK	UK		
Specific Data Used	>90%					-	-	-	-	-	-	-	-	-	-	-	-		
Variation - Products	N/A					-	-	-	-	-	-	-	-	-	-	-	-		
Variation - Sites	N/A					-	-	-	-	-	-	-	-	-	-	-	-		

## Content Information


Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% of product	Biogenic material, kg C/product or declared unit
Timber	327	0%	100%	163.5
OSB	173	0%	100%	86.5
Breather Paper	3.51	0%	100%	1.76
Nails	4.05	0%	0%	0
<b>TOTAL</b>	<b>507</b>	<b>0%</b>	<b>75%</b>	<b>251.8</b>

Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Plastic Strapping	1.04	0.21%	0
Metal Bands	0.14	0.03%	0
Shrink Wrap	2.25	0.44%	0
<b>TOTAL</b>	<b>3.43</b>	<b>0.68%</b>	<b>0</b>

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
N/A			

The electricity datapoint was attained from ecoinvent and is representative of several countries', including the UK's, electricity consumption. The carbon impact of 1 kWh of electricity consumption is 0.31 kg CO<sub>2</sub>e. The chart below represents the different sources of the electricity.

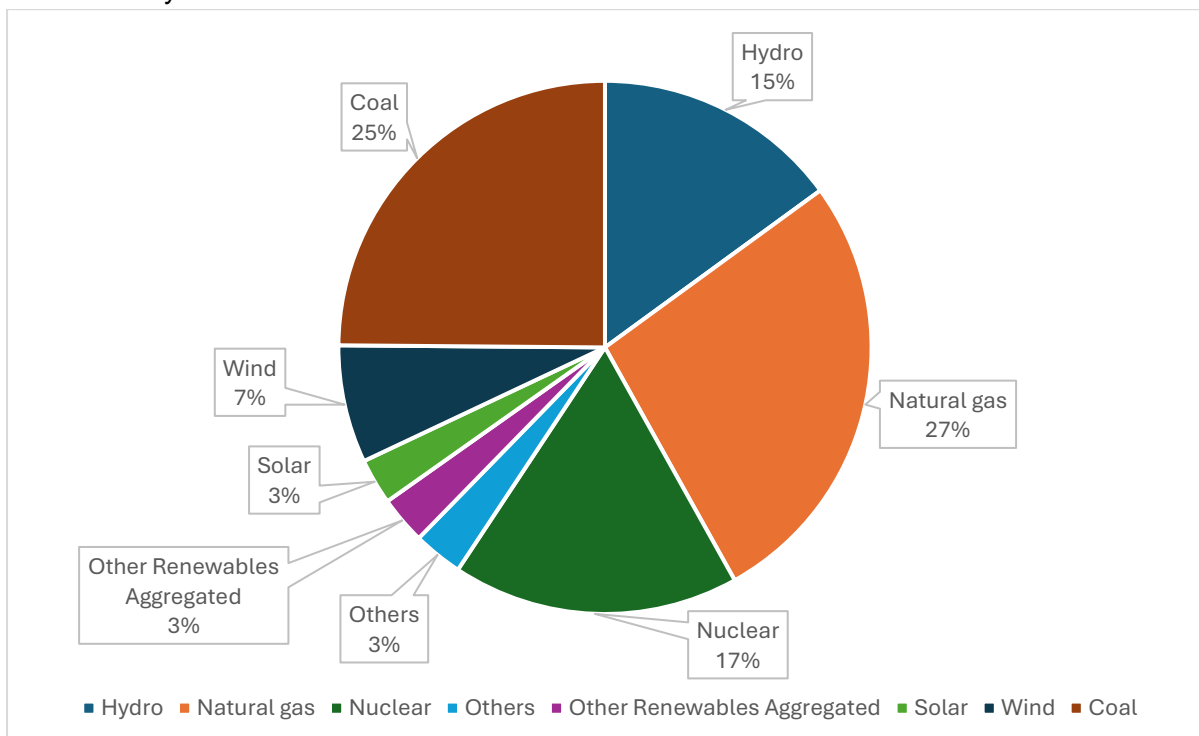

# Results of the Environmental Performance Indicators

Results are presented per 1m<sup>3</sup> open panel.

## Mandatory Impact Category Indicators According to EN 15804

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – total	kg CO <sub>2</sub> e	-481	0.000384	0.395	0	2.67	561	146	-184
GWP – fossil	kg CO <sub>2</sub> e	214	0.000384	0.395	0	2.67	4.19	6.67	-183
GWP – biogenic	kg CO <sub>2</sub> e	-696	0	0	0	0	557	139	-0.384
GWP – LULUC	kg CO <sub>2</sub> e	1.46	0.000000157	0.0000828	0	0.000984	0.00151	0.0000966	-0.215
Ozone depletion pot.	kg CFC-11e	0.0000701	0.000000000846	0.0000000105	0	0.000000613	0.000000481	0.000000124	-0.00000888
Acidification potential	mol H <sup>+</sup> e	1.24	0.00000159	0.000278	0	0.0113	0.139	0.00641	-0.508
EP-freshwater	kg Pe	0.0219	0.00000000324	0.000000471	0	0.0000218	0.0000758	0.0000131	-0.0207
EP-marine	kg Ne	0.404	0.000000464	0.000208	0	0.00336	0.0653	0.00414	-0.140
EP-terrestrial	mol Ne	4.13	0.00000511	0.00104	0	0.037	0.747	0.0309	-1.59
POCP (“smog”)	kg NMVOCe	1.56	0.00000156	0.000399	0	0.0118	0.195	0.0136	-0.444
ADP-minerals & metals	kg Sbe	0.00111	0.00000000134	0.000000184	0	0.00000625	0.0000207	0.000000607	-0.000583
ADP-fossil resources	MJ	3880	0.00556	0.873	0	40	42.4	8.13	-4950
Water use	m <sup>3</sup> e depr.	94.1	0.0000243	0.00322	0	0.179	9.08	0.189	-42.8
Acronyms	<p>GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&amp;metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption</p>								



## Additional Voluntary Impact Category Indicators (EN15804+A1)

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP - GHG	kg CO2e	222	0.00038	0.315	0	2.64	4.13	20.3	-184
Ozone depletion Pot.	kg CFC-11e	0.0000467	0.0000000000671	0.00000000838	0	0.000000486	0.000000434	0.0000000989	-0.00000888
Acidification	kg SO2e	1.02	0.00000124	0.000211	0	0.00877	0.0938	0.00458	-0.430
Eutrophication	kg PO43e	1.05	0.000000284	0.0359	0	0.002	0.132	1.14	-0.152
POCP ("smog")	kg C2H4e	0.0897	0.0000000503	0.0000617	0	0.000342	0.00381	0.00319	-0.0328
ADP-elements	kg Sbe	0.00104	0.0000000013	0.000000181	0	0.00000605	0.0000169	0.00000057	-0.000583
ADP-fossil	MJ	3920	0.00556	0.873	0	40	42.4	8.13	-4950

## Resource Use Indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	8460	0.0000651	0.0116	0	0.451	1.97	0.0635	-1430
PERM	MJ	5820	0	0	0	0	-4660	-1160	0
PERT	MJ	14300	0.0000651	0.0116	0	0.451	-4660	-1160	-1430
PENRE	MJ	3360	0.00556	0.873	0	40	42.5	8.13	-4950
PENRM	MJ	289	0	0	0	0	-231	-57.8	0
PENRT	MJ	3650	0.00556	0.873	0	40	-189	-49.6	-4950
SM	kg	4.29	0.00000183	1.04	0	0.0111	0.141	0.00377	-5.15
RSF	MJ	351	0.0000000237	0.0000026	0	0.000112	0.000262	0.0000182	-0.00315
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m3	2.29	0.000000656	0.000109	0	0.00519	0.219	0.00135	-1.003
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

## Waste Indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	18.3	0.000008	0.000928	0	0.0531	0.00577	0.0422	-10.68
Non-hazardous waste	kg	530	0.000128	2.42	0	0.872	449	116	-118
Radioactive waste	kg	0.0155	0.0000000367	0.00000276	0	0.000268	0.00000319	0.00000601	-0.031

## Output Flow Indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	0	0	0	452	0	-0.229
Materials for energy rec	kg	0	0	0	0	0	0	0	0
Exported energy	MJ	0	0	0	0	0	3861	0	0

## Other Environmental Performance Indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Particulate matter	Incidence	0.0000244	0.0000000000327	0.000000000625	0	0.000000307	0.00000112	0.000000163	-0.00000423
Ionizing radiation 6)	kBq U235e	45.1	0.0000258	0.00295	0	0.191	0.17	0.0363	-174
Ecotoxicity (freshwater)	CTUe	6960	0.00512	1.15	0	36	103	15.2	-585
Human toxicity, cancer	CTUh	0.000000854	0.00000000000144	0.0000000000194	0	0.000000000885	0.000000133	0.0000000113	-0.00000107
Human tox. non-cancer	CTUh	0.00000895	0.00000000000476	0.000000000602	0	0.0000000357	0.000000392	0.000000040	-0.00000121
SQP 7)	-	51000	0.00385	1.06	0	46.1	15.6	30	-2510
Acronyms	6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.								

## References

General Programme Instructions of the International EPD® System. Version 4.0.

OneClick LCA, Version 1.13.0

Ecoinvent Data Base Version 3.10

PCR 2019 :14 Construction Products and Services. Version 1.3.3

IEA 50 2024: Monthly Electricity Statistics, <https://www.iea.org/data-and-statistics/data-tools/monthly-electricity-statistics>